

LINAIRE® Flex Side Bend RGBW Linear Light

Side-bending RGBW architectural light with vibrant, full-spectrum output. Water resistant and fully diffused for a dotless look.

Date _____

Project Notes _____



FEATURES	HYBRID ORDERING CODE (OPTIONAL)
<ul style="list-style-type: none"> • Side-bending for curved architectural details • Flexible, durable fixture with no visible dots • Water resistant for indoor and outdoor use • Full color RGBW • 90+ CRI • Factory assembly (IP67), Field adjustable termination (IP65) 	

ORDERING CODES	HYBRID ORDERING CODE (OPTIONAL)
Order spools, and components for field assembly	Soldered Wire Lead and Connection Options


DI	Voltage	Model	Series	Color	Length	Wire Entry	Input Wire Color, Length, and Connection			Output Wire Color, Length, and Connection		
	24V (24V Volt)	SE	LIN	RGBW (RGBW)	016 (16 feet wet location) CSTM_ (__in.) wet location	STE (Straight Wire Entry) SDE* (Side Wire Entry) BE* (Bottom Wire Entry) *Alternate Wire Leads Available via Factory Finished Only	Color & Type	Length	Connection	Color & Type	Length	Connection
							WH (White CL2 - Default)	36l (36 in. - Default)	BW (Bare Wire - Default)	*blank* (No Wire - Default)		
								__ in.	WH (White CL2)	__ in.	BW (Bare Wire - Default)	

GENERAL SPECIFICATIONS (ALL MODELS)


Voltage	24VDC
Wattage	4.5W/ft.
RGBW	All: 75 Lm/ft. 3000K: 27 Lm/ft. Red: 10 Lm/ft. Green: 34 Lm/ft. Blue: 7 Lm/ft.
Cut Points	1.96 in.
Dimmable	Yes
Max Run (ft.)	16.4 ft.
CRI	90+
Dimensions	0.45 x 0.79 in. (W x H)
Environment	Outdoor / Wet Location (IP65 / IP67)
Lead Wire A	96 in. White Bare Lead 20/5 AWG UL 3132 Wire with Strain Relief
Lead Wire B	96 in. White Bare Lead 20/5 AWG UL 3132 Wire with Strain Relief
LED Chips	36/ft.
Chip Type	5050
Certification	UL Listed 2108
Limited Warranty	5 Year Limited Warranty

MECHANICAL DIAGRAMS


24V-SE-LIN-RGBW

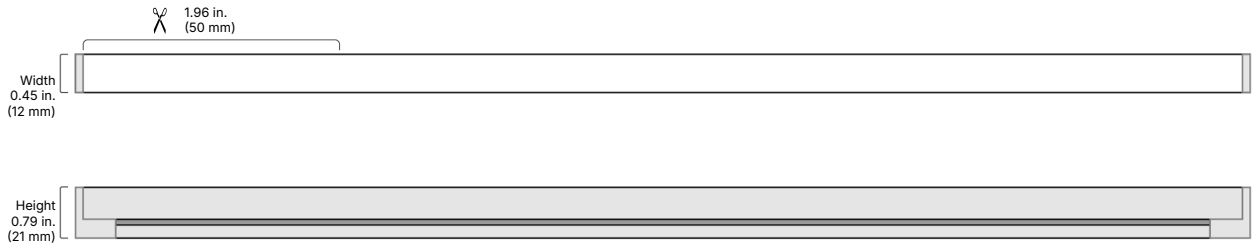


CONNECTIONS

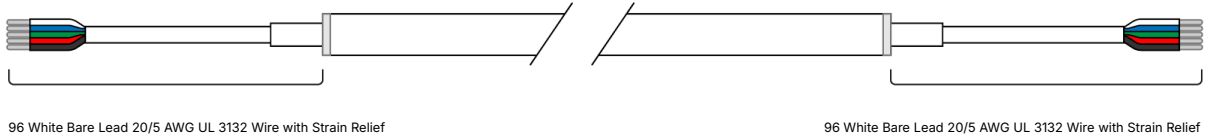

**24V-SE-LIN-RGBW in
LINAIRE Flex Side Bend Channel**




**24V-SE-LIN-RGBW in
LINAIRE Flex Side Bend Spine Channel**



ACCESSORIES


DI-LIN-SE-MTCH-39

LINAIRE Flex, Side Bend, Mounting Channel, 39 in., Aluminum




DI-LIN-SE-SPINE-39

LINAIRE Flex, Side Bend, Mounting Spine Channel, 39 in., White




DI-LIN-SE-MTCL-2

LINAIRE Flex, Side Bend, Mounting Clips, 2 Pack, White



DI-LIN-SE-DEC

LINAIRE Flex, Side Bend, Dead End Cap



DELIVERY OPTIONS

- **Factory + Field (Hybrid) (IP65)**
Fastest order fulfillment. Field connectors and accessories not included.
- **Factory Assembly (IP67)**
Onsite modifications with factory connection. Additional accessories not included.

RECOMMENDED POWER SUPPLIES

For additional Power Supply information, refer to individual Specification Sheet data at diodeled.com.

- VLM
- MEANWELL

VLM SERIES CONSTANT VOLTAGE DRIVER

Compact driver for on/off, PWM dimming, and color-changing applications.

SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
VLM100W-24	Class 2 5.38 x 1 x 0.77 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM100W-24-LPM	Class 2 8.19 x 2.94 x 1.31 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM100W-24-LPS	Class 2 11.25 x 3.75 x 1.9 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM100W-24-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 / 277VAC 47 - 63Hz	24V / 96W	None
VLM200W-24-LPL	Class 2 13.5 x 4.5 x 2.38 in.	120 / 277VAC 47 - 63Hz	24V / 100W (X2)	None
VLM60W-24	Class 2 5.1 x 0.75 x 0.77 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None
VLM60W-24-LPM	Class 2 8.19 x 2.94 x 1.31 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None
VLM60W-24-LPS	Class 2 11.25 x 3.75 x 1.9 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None
VLM60W-24-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 / 277VAC 47 - 63Hz	24V / 60W	None

MEANWELL CONSTANT VOLTAGE DRIVER

Drivers for on/off or PWM dimming applications.

SKU	GENERAL SPECS	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE & MAXIMUM LOAD	MINIMUM LOAD
DI-0954	Class 2 7.87 x 2.78 x 1.38 in.	90 ~ 295VAC / 47 ~ 63Hz	24V / 96W	None
DI-0954-LPL	Class 2 11.25 x 3.75 x 1.9 in.	90 ~ 295VAC / 47 ~ 63Hz	24V / 96W	None
DI-0954-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	90 ~ 295VAC / 47 ~ 63Hz	24V / 96W	None
DI-0970	Class 2 5.83 x 1.57 x 1.18 in.	90 ~ 264VAC / 47 ~ 63Hz	24V / 35W	None
DI-0970-LPS	Class 2 11.25 x 3.75 x 1.9 in.	90 ~ 264VAC / 47 ~ 63Hz	24V / 35W	None
DI-0970-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	90 ~ 264VAC / 47 ~ 63Hz	24V / 35W	None
DI-CV-24V150W	Not Class 2 7.52 x 2.5 x 1.48 in.	90 ~ 132VAC / 47 ~ 63Hz	24V / 150W	None
DI-CV-24V200W	Not Class 2 8.46 x 4.53 x 1.18 in.	88 ~ 264VAC, 47 ~ 60Hz	24V / 200W	None
DI-CV-24V330W	Not Class 2 8.5 x 4.13 x 1.61 in.	85 ~ 264VAC / 47 ~ 63Hz	24V / 330W	None
DI-CV-24V60W-OWA	Class 2 5.1 x 2.1 x 1.4 in.	90 ~ 264VAC 127 ~ 370VAC	24V / 60W	None
DI-CV-24V90W-OWA	Class 2 6.75 x 2.5 x 1.5 in.	90 ~ 264VAC 127 ~ 370VAC	24V / 90W	None
DI-CV-MW24V60W-277	Class 2 5.9 x 2.1 x 1.4 in.	120 ~ 277VAC 50/60Hz	24V / 60W	None
DI-CV-MW24V60W-277-LPS	Class 2 11.25 x 3.75 x 1.9 in.	120 ~ 277VAC 50/60Hz	24V / 60W	None
DI-CV-MW24V60W-277-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 ~ 277VAC 50/60Hz	24V / 60W	None
DI-CV-MW24V90W-277	Class 2 6.8 x 2.5 x 1.5 in.	120 ~ 277VAC 50/60Hz	24V / 90W	None
DI-CV-MW24V90W-277-LPL	Class 2 13.5 x 4.5 x 2.38 in.	120 ~ 277VAC 50/60Hz	24V / 90W	None
DI-CV-MW24V90W-277-LPS3R	Class 2 10.79 x 7.34 x 2.36 in.	120 ~ 277VAC 50/60Hz	24V / 90W	None
DI-CV-24V150W-277	Not Class 2 9 x 2.67 x 1.5 in.	120 ~ 277VAC 50/60Hz	24V / 150W / 6.3A	None
DI-CV-24V240W-277	Not Class 2 9.61 x 2.67 x 1.53 in.	120 ~ 277VAC 50/60Hz	24V / 240W / 10A	None
DI-CV-24V320W-277	Not Class 2 9.92 x 3.54 x 1.72 in.	120 ~ 277VAC 50/60Hz	24V / 320W / 13.34A	None
DI-CV-24V480W-277	Not Class 2 10.31 x 4.92 x 1.72 in.	120 ~ 277VAC 50/60Hz	24V / 480W / 20A	None
DI-CV-24V600W-277	Not Class 2 11.02 x 5.67 x 1.9 in.	120 ~ 277VAC 50/60Hz	24V / 600W / 25A	None

RECOMMENDED CONTROLLERS

For additional Controller information, refer to individual Specification Sheet data at diodeled.com.

CASAMBI® CONTROLLERS

The CASAMBI controllers will remotely control your lighting through the app - downloadable for IOS & Android.

SKU	DESCRIPTION
CBU-PWM4	CASAMBI PWM4 Single Color Dimming Controller
DI-CBU-PWM5-PRO	Casambi CBU-PWM5-Pro RGB/W/WW Applications, 5 x PWM for constant voltage lights, 4 amps/CH max

TOUCHDIAL™ CONTROL SYSTEMS

The TOUCHDIAL™ zone control system controls single color dimming, tunable white, and color changing LED lighting via mobile device and additional TOUCHDIAL controls.

SKU	DESCRIPTION
DI-RF-REC-CV-A	TOUCHDIAL Color Control System - WiFi Receiver
DI-RF-REC-CV-SC	TOUCHDIAL Mini Receiver - Single Channel and Zone
DI-RF-REM-DIM-1	TOUCHDIAL Mini Remote - Single Zone
DI-RF-REM-DIM-5	TOUCHDIAL Remote Dimmer 5-Zone Dimmer Control
DI-RF-REM-RGBW-1	TOUCHDIAL Mini Remote RGB(W) - Single Zone
DI-RF-REM-RGBW-4	TOUCHDIAL Color Control System - RGB/RGBW 4-Zone Remote Controller
DI-RF-WMT-RGBW	TOUCHDIAL RGB(W) Wall Control - Single Zone
DI-WIFI-RF-TRMS	TOUCHDIAL Color Control System - WiFi Hub
DI-RF-REM-TW3-4	TOUCHDIAL Color Control System, 3-Anchor Tunable White 4-Zone Remote Controller

CERTIFICATIONS

Safety

- UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750. UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.
- Approved for storage areas of clothes closets per NEC 410.16.A.1,3 and 410.16.C.1,3,5

Environment

- IP65 - Field Connections and Terminations
- IP67 - Stock Spools and Factory Assembled Fixtures
- Ambient Temperature: -4 ~ 122°F (-20 ~ 50°C)
- Operating Temperature: -4 ~ 176°F (-20 ~ 80°C)

Performance

- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
8. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
9. Do not modify product beyond instructions or warranty will be void.
10. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
11. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
12. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

LIMITED WARRANTY

- 5 Year Limited Warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.diodeled.com/limited-warranty/ within the Policies section. For warranty related questions please contact product support.

Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.

- Lumen value measured in accordance to IES LM-79-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.